


# DMP Factory 350

Robust, high quality Metal Additive Manufacturing with integrated powder management

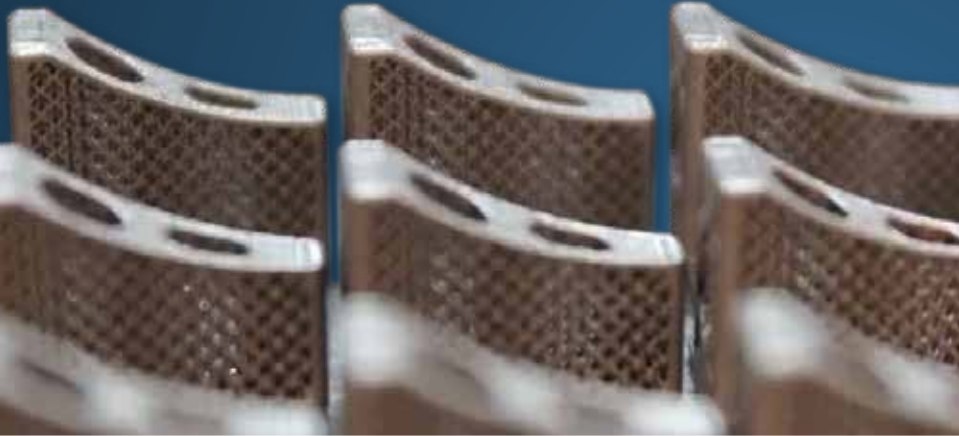

For companies scaling their metal AM production and requiring limited operator exposure to powder. High throughput, highly repeatable metal AM system that generates precision quality parts from a broad range of alloys with high quality material management for maximum powder usage. Integrated metal 3D printing solution with DMP production metal printer, 3DXpert® software, thoroughly qualified LaserForm materials and expert application support.

## HIGH QUALITY POWDER & PROCESS MANAGEMENT

- Integrated powder handling and automatic sieving
- Significantly limited operator exposure to powder
- Consistent, low O<sub>2</sub> environment (<25 ppm)
- High powder recyclability – improved powder usability lifetime

## DESIGNED FOR SCALING METAL AM PRODUCTION

- Small footprint for reduction of overall required floor space
- Automated workflow steps
- Material-type dedicated
- Real-time process monitoring with DMP Monitoring

## HIGH THROUGHPUT METAL 3D PRINTING

- Fast bidirectional material deposition
- Short change-over time - high printer utilization
- Optimized scan strategies for maximum productivity

## HIGH REPEATABILITY FOR HIGH QUALITY PARTS

- Purest atmosphere during printing, consistent, low O<sub>2</sub> environment (<25 ppm)
- Excellent microstructure, very high density
- Repeatable, stable mechanical properties
- Consistent accuracy - part to part - machine to machine
- Thoroughly developed and tested print settings

## LOW TOTAL COST OF OPERATION (TCO) FOR AFFORDABLE PER PART COSTS

- Automated processes
- High powder recyclability
- Low usage of consumables
- Small footprint

# DMP Flex 350

## Robust, flexible Metal Additive Manufacturing for 24/7 part production

Flexible, high throughput, highly repeatable metal AM system that generates high quality precision parts from a broad range of alloys with a build volume of 275 x 275 x 420 mm. Integrated metal 3D printing solution with DMP production metal printer, 3DXpert software, thoroughly qualified LaserForm materials and expert application support.



### Built on the proven architecture of ProX DMP 320 since 2008 with:

- High repeatability for high quality parts
- Low TCO for affordable per part costs
- High throughput metal 3D printing

### Flexible application use

- Ideal for application development, production and R&D
- Easily scalable, due to consistent machine to machine performance

	DMP Flex 350	DMP Factory 350
<b>Specifications</b>		
Laser power type	500 W/Fiber laser <sup>1</sup>	500 W/Fiber laser <sup>1</sup>
Build volume (X x Y x Z) Height inclusive of build plate	275 x 275 x 420 mm (10.82 x 10.82 x 16.54 in)	275 x 275 x 420 mm (10.82 x 10.82 x 16.54 in)
Layer thickness	Adjustable, min. 5 µm, typical: 30, 60, 90 µm	Adjustable, min. 5 µm, typical: 30, 60, 90 µm
Repeatability	$\Delta x (3\sigma) = 60\mu\text{m}$ , $\Delta y (3\sigma) = 60\mu\text{m}$ , $\Delta z (3\sigma) = 60\mu\text{m}$	$\Delta x (3\sigma) = 60\mu\text{m}$ , $\Delta y (3\sigma) = 60\mu\text{m}$ , $\Delta z (3\sigma) = 60\mu\text{m}$
Minimum feature size	200 µm	200 µm
Typical accuracy	$\pm 0.1\text{-}0.2\%$ with $\pm 100 \mu\text{m}$ minimum	$\pm 0.1\text{-}0.2\%$ with $\pm 100 \mu\text{m}$ minimum
<b>Quality Control</b>		
DMP Monitoring	Optional	Optional
<b>Control System and Software Suite</b>		
Software tool	3DXpert all-in-one software for metal AM	3DXpert all-in-one software for Metal AM
Control Software	DMP software suite	DMP software suite
<b>Powder Management</b>		
Powder management	Optional external	Integrated
LaserForm metal alloy choices with developed print parameters:	LaserForm Ti Gr1 (A) <sup>2</sup> LaserForm Ti Gr5 (A) <sup>2</sup> LaserForm Ti Gr23 (A) <sup>2</sup> LaserForm AlSi10Mg (A) <sup>3</sup> LaserForm AlSi7Mg0.6 (A) <sup>3</sup> LaserForm Ni625 (A) <sup>3</sup> LaserForm Ni718 (A) <sup>3</sup> LaserForm 17-4PH (A) <sup>3</sup> LaserForm 316L (A) <sup>3</sup> LaserForm Maraging Steel (A) <sup>3</sup> LaserForm CoCrF75 (A) <sup>3</sup>	LaserForm Ti Gr1 (A) <sup>2</sup> LaserForm Ti Gr5 (A) <sup>2</sup> LaserForm Ti Gr23 (A) <sup>2</sup> LaserForm AlSi10Mg (A) <sup>3</sup> LaserForm AlSi7Mg0.6 (A) <sup>3</sup> LaserForm Ni625 (A) <sup>3</sup> LaserForm Ni718 (A) <sup>3</sup> LaserForm 316L (A) <sup>3</sup>
Other materials available upon request		

<sup>1</sup>Maximum laser power at powder layer is typical 450W for 500W lasers <sup>2</sup>Set up A <sup>3</sup>Set up B



**GF Machining Solutions**  
Roger-Federer-Allee 7  
2504 Biel/Bienne  
Switzerland  
www.gfms.com

259.806.942-EN



**3D Systems Corporation**  
333 Three D Systems Circle  
Rock Hill, SC 29730  
United States  
www.3dsystems.com

3DS-10205D

Warranty/Disclaimer: The performance characteristics of these products may vary according to product application, operating conditions, material combined with, or with end use. 3D Systems and GF Machining Solutions make no warranties of any type, express or implied, including, but not limited to, the warranties of merchantability or fitness for a particular use.

© 2021 by 3D Systems, Inc. All rights reserved. Specifications subject to change without notice. 3D Systems, the 3D Systems logo, and 3DXpert are registered trademarks of 3D Systems, Inc.